

KIRAVANS



Build your adventure.

Fitting Guide



Kiravans X82 Double Passenger Seat Swivel

Vauxhall/Opel Vivaro X82

Renault Trafic X82

Fiat Talento X82

Nissan NV300 X82

Tools required:

- 17mm socket spanner
- 16mm socket spanner
- 11mm socket
- T30 Torx bit
- Hack saw

Kiravans Double Passenger Seat Fitting Guide

Removal of seat




- Take plastic trim off seat base



- Detach seat belt from the side of the seat (17mm socket spanner)




- Remove 2 x front seat nuts (16mm socket spanner for front 2 bolts)

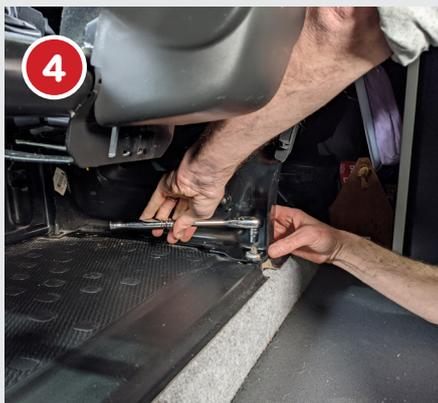

- Remove 2 x rear fixing bolts (11mm socket)



- Lift seat off and take out of van

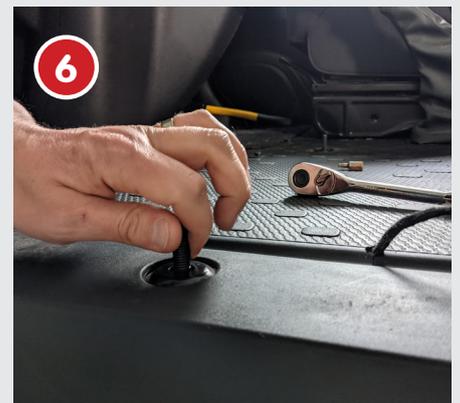

- Remove the 2 front bolts sticking up through the floor (T30 torx bit)



- Cut off the 2 x 'top hats' under rear of seat frame. (Use a hack saw between the main seat frame and 'washer', then prise off with an old screwdriver). Note: the removed pieces will get used again so don't lose them!

Kiravans Double Passenger Seat Fitting Guide

Installing the swivel



- Hide any unused cabling under the side step trim



- Position the 2 x 'top hats' over the rear mounting holes so that they fill the holes in the rubber floor mat



- Position swivel in place (reinforcing bars to the rear) so that the rear fixing holes are aligned on top of your 'top hats'



- Use the original 2 x thick washers and original bolts to fix the rear of the swivel



- Use the enclosed 50mm bolts and washers for the front fixing points (these replace the original threaded rods that you have already removed)



- When attaching swivel to the van floor, take care to work your way around all 4 fixings gradually tightening each in turn (so that you avoid twisting the swivel plates)

Kiravans Double Passenger Seat Fitting Guide



- Remove the nuts and washers from the upward pointing bolts on your swivel



- Remove the loose upward pointing bolt from the back right corner of the swivel



- Lift seat back in and position it onto your swivel



- Use the nuts and washers to attach the two front and the rear left corner of the seat



- In the back right corner, use the enclosed 10mm bolt and a washer (feed them in from below) and fix with a washer and nut



- Replace your seat belt and plastic trim & enjoy (cheesy picture of Rob) !



Visit our channel for
HANDY HOW TO
videos and more



No Quibble Returns

We offer a **no quibble guarantee** which means no fuss will be made, that you'll just get your money back if you are in any way dissatisfied with your purchases. And we are so confident you'll be a happy camper we offer a **3 year** No Quibble Return on **all our products**

Your plans have changed?

No problem, visit the returns page on our website for details.

